SERVICE MANUAL

Ver 1.0 2001.04

AEP Model **UK Model**



Photo: TA-FE570 (BLACK)

SPECIFICATIONS

Amplifier section

DIN power output

TA-FE570: 110 W + 110 W(4 ohms at 1 kHz) 70 W + 70 W TA-FE370: (4 ohms at 1 kHz)

Frequency response

PHONO (20 Hz - 20 kHz): RIAA equalization curve ±1.0 dB

TUNER, CD, AUX, TAPE1/DAT, TAPE2/MD: 7 Hz - 70 kHz +0 dB

S/N (network A)

80 dB

TUNER, CD, AUX, TAPE1/DAT, TAPE2/MD:

105 dB

Output voltage/impedance

200 mV, 1 kilohm PHONES: 5 mW (at 8 ohms)

Speakers impedance 4 - 16 ohms

Damping factor 80 (8 ohms, 1 kHz) General

System

Power amplifier with all stages directly coupled Low-noise, equalizer

Preamplifier:

amplifier

Power requirements 230 V AC, 50/60 Hz

Power consumption

TA-FE570: 190 W

160 W TA-FE370: 0.6 W

(In standby mode)

Dimensions (approx.) (w/h/d)

430 x 135 x 310 mm incl. projecting parts and

controls

Mass (approx.)

TA-FE570: 6.5 kg TA-FE370: 5.5 kg

Supplied accessories

Remote commander (remote) RM-S325 (1)

Sony batteries R6 (size-AA) (2)

Design and specifications are subject to change without notice.

INTEGRATED STEREO AMPLIFIER

Sony Corporation 9-873-838-11 2001D0500-1 **Home Audio Company**

© 2001.4 Shinagawa Tec Service Manual Production Group




SECTION 1 SERVICING NOTES

TABLE OF CONTENTS

1.	SERVICING NOTES	2
2.	GENERAL Location of Controls	3
3.	DISASSEMBLY	
3-1.	Disassembly Flow	4
3-2.	Case	4
3-3.	Front Panel Assy	5
3-4.	MAIN Board	5
4.	DIAGRAMS	
4-1.	Note for Printed Wiring Boards	
	and Schematic Diagrams	7
4-2.	Printed Wiring Board – MAIN Board –	8
4-3.	Schematic Diagram – MAIN Board –	9
4-4.	Printed Wiring Boards - CONTROL/SPEAKER SW/	
	VOLUME/Boards –	10
4-5.	Schematic Diagram - CONTROL/SPEAKER SW/	
	VOLUME Boards –	11
4-6.	Printed Wiring Boards	
	– AC OUTLET/HEADPHONE/LOUDNESS/	
	POWER SW/STANDBY Boards –	12
4-7.	Schematic Diagram	
	- AC OUTLET/HEADPHONE/LOUDNESS/	
	POWER SW/STANDBY Boards –	13
4-8.	IC Pin Function Description	14
5.	EXPLODED VIEWS	
5-1.	Case Section	15
5-2.	Front Panel Section	16
5-3.	Chassis Section	17
6.	ELECTRICAL PARTS LIST	18

MODEL IDENTIFICATION


- Back Panel -

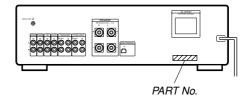

Model	PART No.
TA-FE570: AEP model	4-233-359-0□
TA-FE570: UK model	4-233-359-1
TA-FE370: AEP model	4-233-359-2
TA-FE370: UK model	4-233-359-3

MAIN BOARD SETTING

On AEP model of this set, AC outlet is mounted onto the AC OUT-LET board holding the back panel between. Since removing the MAIN board alone is difficult, in repairing the MAIN board, handle the MAIN board with the back panel connected as shown in the figure below.

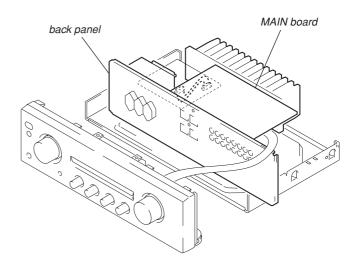

SAFETY-RELATED COMPONENT WARNING!!


COMPONENTS IDENTIFIED BY MARK \triangle OR DOTTED LINE WITH MARK \triangle ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

SECTION 2 GENERAL

This section is extracted from instruction manual.

LOCATION OF CONTROLS


Front Panel

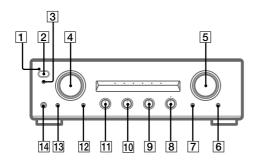

BALANCE 8 (8)
BASS 10 (8)
EON LINK (TA-FE570 only) 13 (8)
INPUT SELECTOR 4 (8, 9)
LOUDNESS 6 (8)
PHONES jack 14 (8)
SOURCE DIRECT 7 (8)
SPEAKERS selector 11 (8)
STANDBY indicator 1
TAPE1 MONITOR (TA-FE570 only) 12 (9)
TREBLE 9 (8)
VOLUME control 5 (8)
I/\(\therefore\) (power) 2 (8, 9)

(remote control sensor) 3 (5)

Back Panel

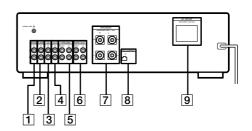


- 1 PHONO jack
- 2 TUNER jack
- 3 CD jack
- 4 AUX jack
- 5 TAPE2/MD jack
- 6 TAPE1/DAT jack
- **7** SPEAKERS terminal
- 8 EON CONTROL connector (FE570)
- 9 AC OUTLET connector (AEP model)

SECTION 3 DISASSEMBLY


• This set can be disassembled in the order shown below.

3-1. DISASSEMBLY FLOW

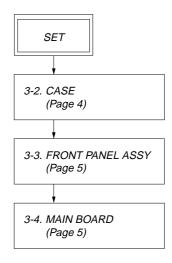


Note: Follow the disassembly procedure in the numerical order given.


3-2. CASE

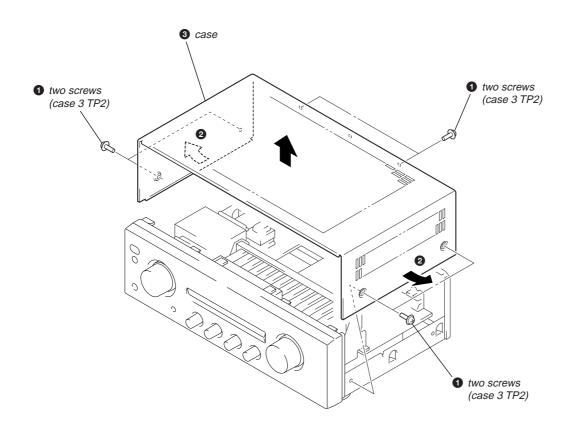

3-3. FRONT PANEL ASSY

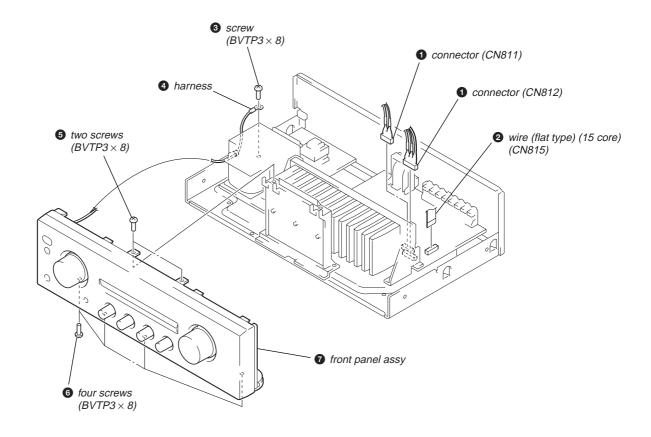

3-4. MAIN BOARD

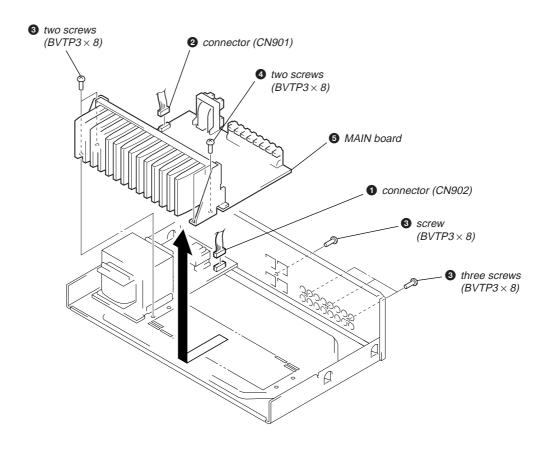

<u>MEMO</u>

SECTION 4 DIAGRAMS

4-1. NOTE FOR PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

Note on Printed Wiring Board:

- parts extracted from the component side.
 Pattern from the side which enables seeing.
- (The other layers' patterns are not indicated.)
- Indication of transistor





Note on Schematic Diagram:


- All capacitors are in μF unless otherwise noted. pF: $\mu \mu F$ 50 WV or less are not indicated except for electrolytics and tantalums.
- \bullet All resistors are in Ω and $^{1}\!/_{\!4}\,W$ or less unless otherwise specified.
- : nonflammable resistor.
- : panel designation.

Note: The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.


- === : B+ Line. === : B- Line.
- · Voltages and waveforms are dc with respect to ground under no-signal conditions.
- no mark : TUNER
- Voltages are taken with a VOM (Input impedance 10 $M\Omega$). Voltage variations may be noted due to normal production tolerances.
- · Waveforms are taken with a oscilloscope. Voltage variations may be noted due to normal production tolerances.
- Circled numbers refer to waveforms.
- Signal path.
- : TAPE1/DAT IN : RECOUT
- : TAPE2/MD IN
- ⇒ : TUNER
 ⇒ : TAPE1/D/
 ⇒ : RECOUT
 ⇒ : TAPE2/M
 ⇒ : CD
 ⇒ : PHONO

- Waveform
- CONTROL Board -

1 IC801 (XOUT)



Circuit Boards Location

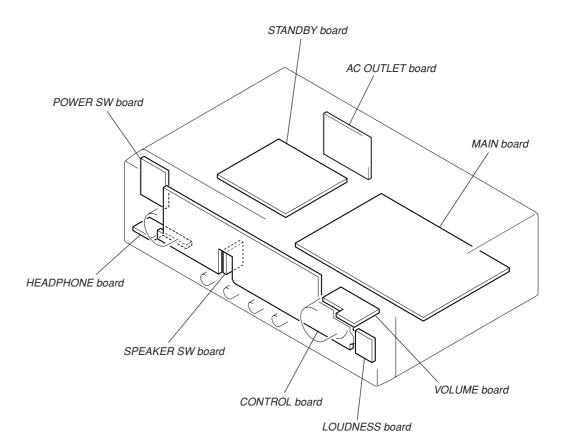


TA-FE370/FE570


4-2. PRINTED WIRING BOARD - MAIN Board - • See page 7 for Circuit Boards Location.

• Semiconductor Location


Ref. No.	Location
D101 D301 D302 D351 D352 D601 D901 D902 D903 D904 D905 D906 D907 D909	C-5 E-7 E-7 E-7 D-7 E-9 C-6 C-7 C-8 B-9 C-8 B-9
IC101 IC102 IC301 IC601 IC901	D-3 C-1 G-5 E-5 B-8
Q101 Q102 Q103 Q104 Q151 Q301 Q351 Q901 Q902 Q903	D-5 E-2 C-5 E-2 D-5 E-7 E-7 C-6 C-7

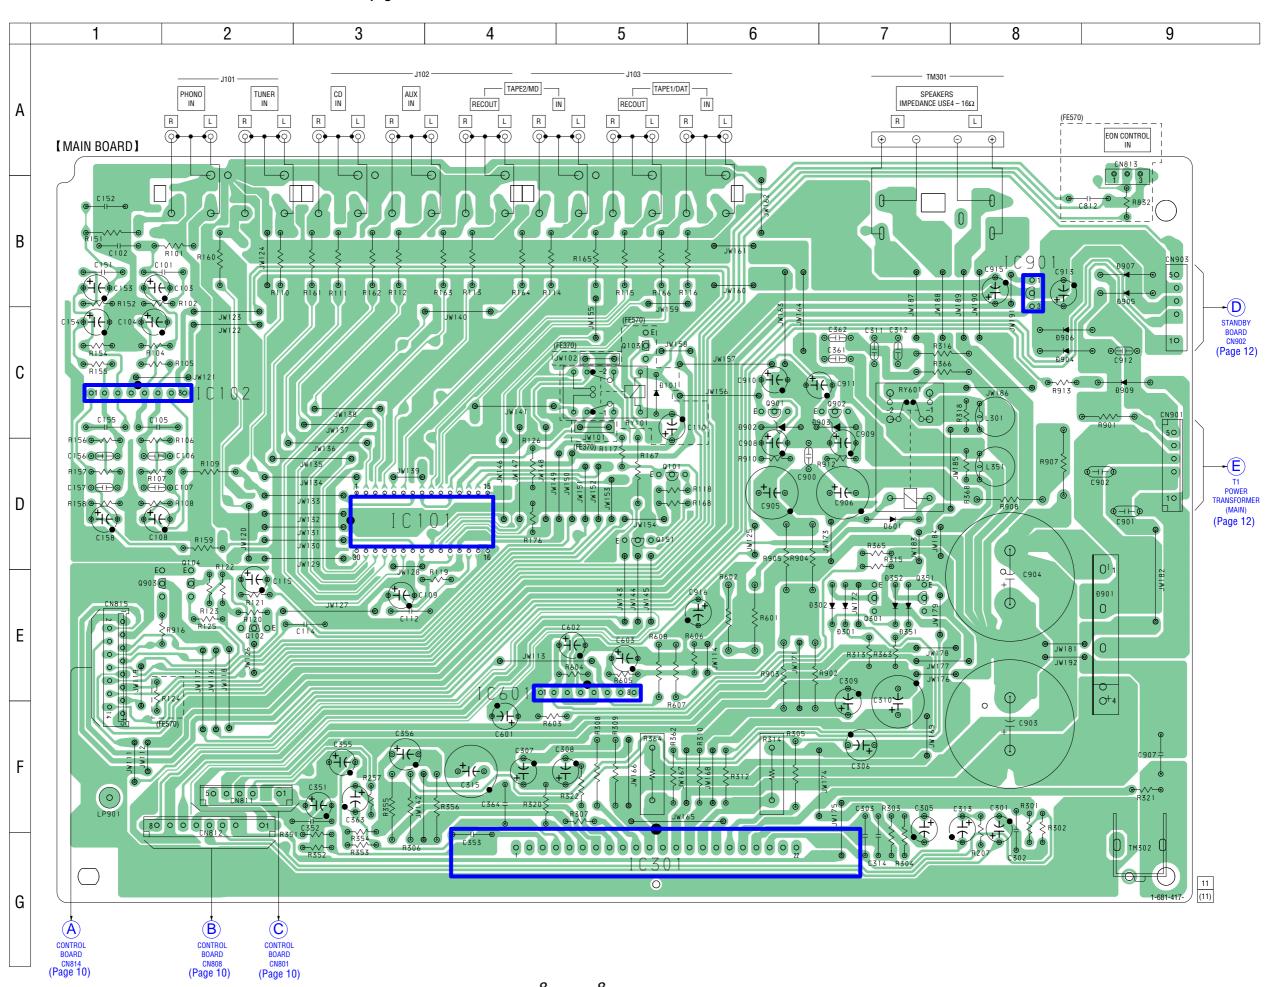

4-3. SCHEMATIC DIAGRAM - MAIN Board - • See page 14 for IC Block Diagrams.

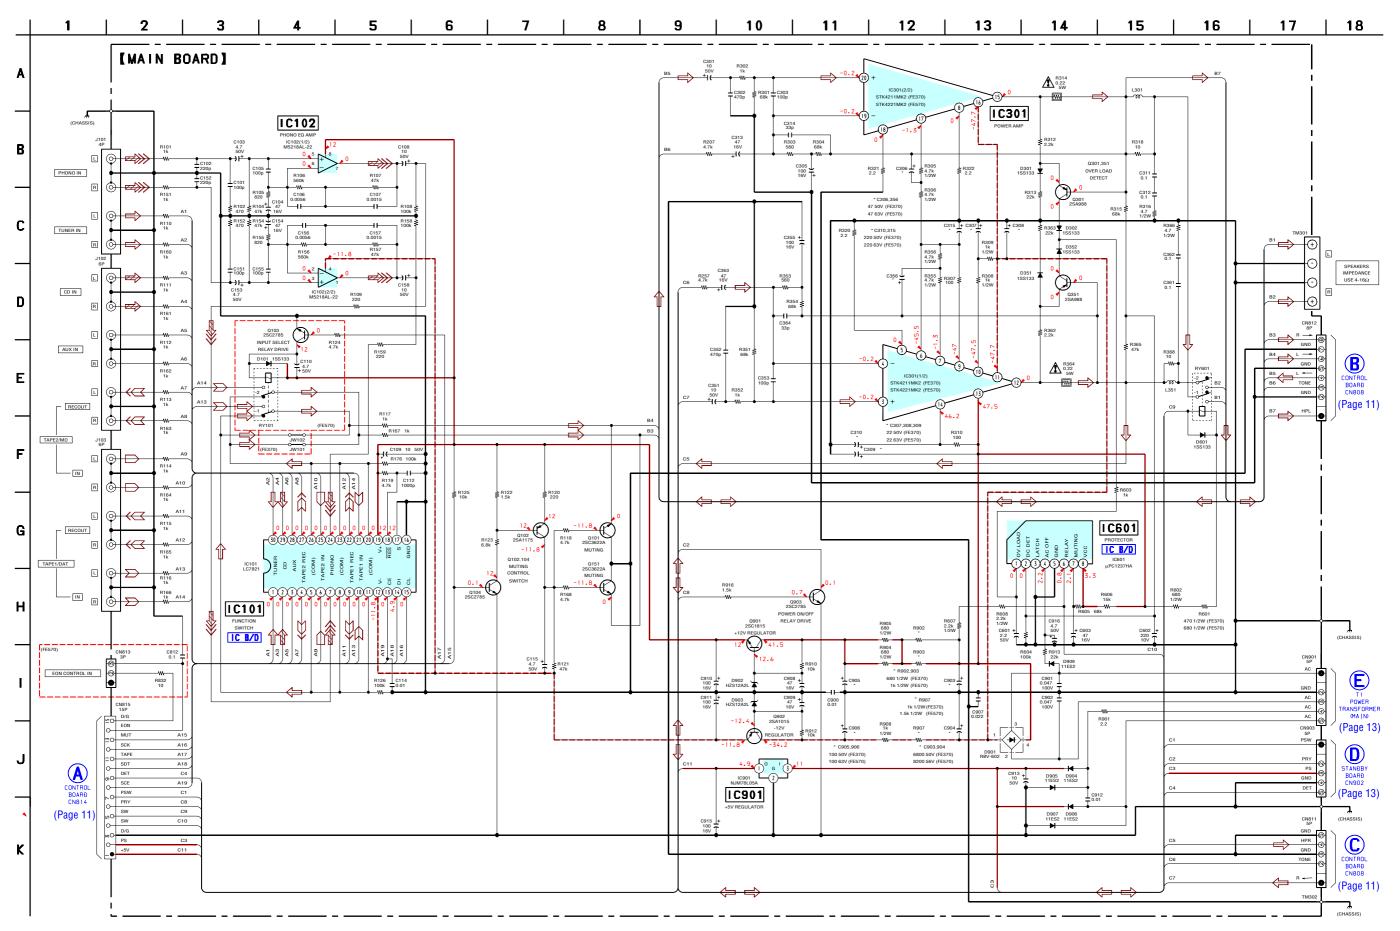


4-4. PRINTED WIRING BOARDS - CONTROL/SPEAKER SW/VOLUME Boards - • See page 7 for Circuit Boards Location.

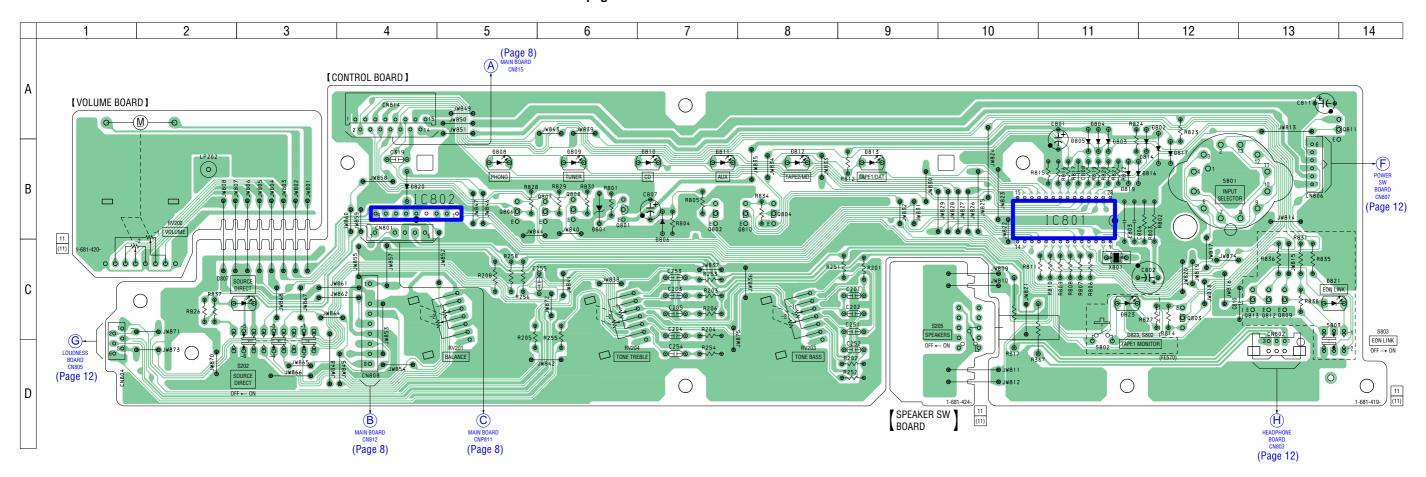

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location
D801	B-6	D821	C-13
D802	B-12	D823	C-11
D803	B-11		
D804	B-11	IC801	B-11
D805	B-11	IC802	B-4
D806	B-7		
D807	C-3	Q801	B-6
D808	B-5	Q802	B-7
D809	B-6	Q803	C-12
D810	B-7	Q804	B-8
D811	B-7	Q806	B-5
D812	B-8	Q807	B-6
D813	B-9	Q808	B-6
D814	B-12	Q809	C-13
D816 D817	B-12	Q810 Q811	B-8 A-14
D817 D819	B-12 B-11	Q812	C-13
D820	B-11	Q813	C-13
D020	D-4	uois	0-13


4-5. SCHEMATIC DIAGRAM - CONTROL/SPEAKER SW/VOLUME Boards - • See page 7 for Waveform. • See page 14 for IC Block Diagram.

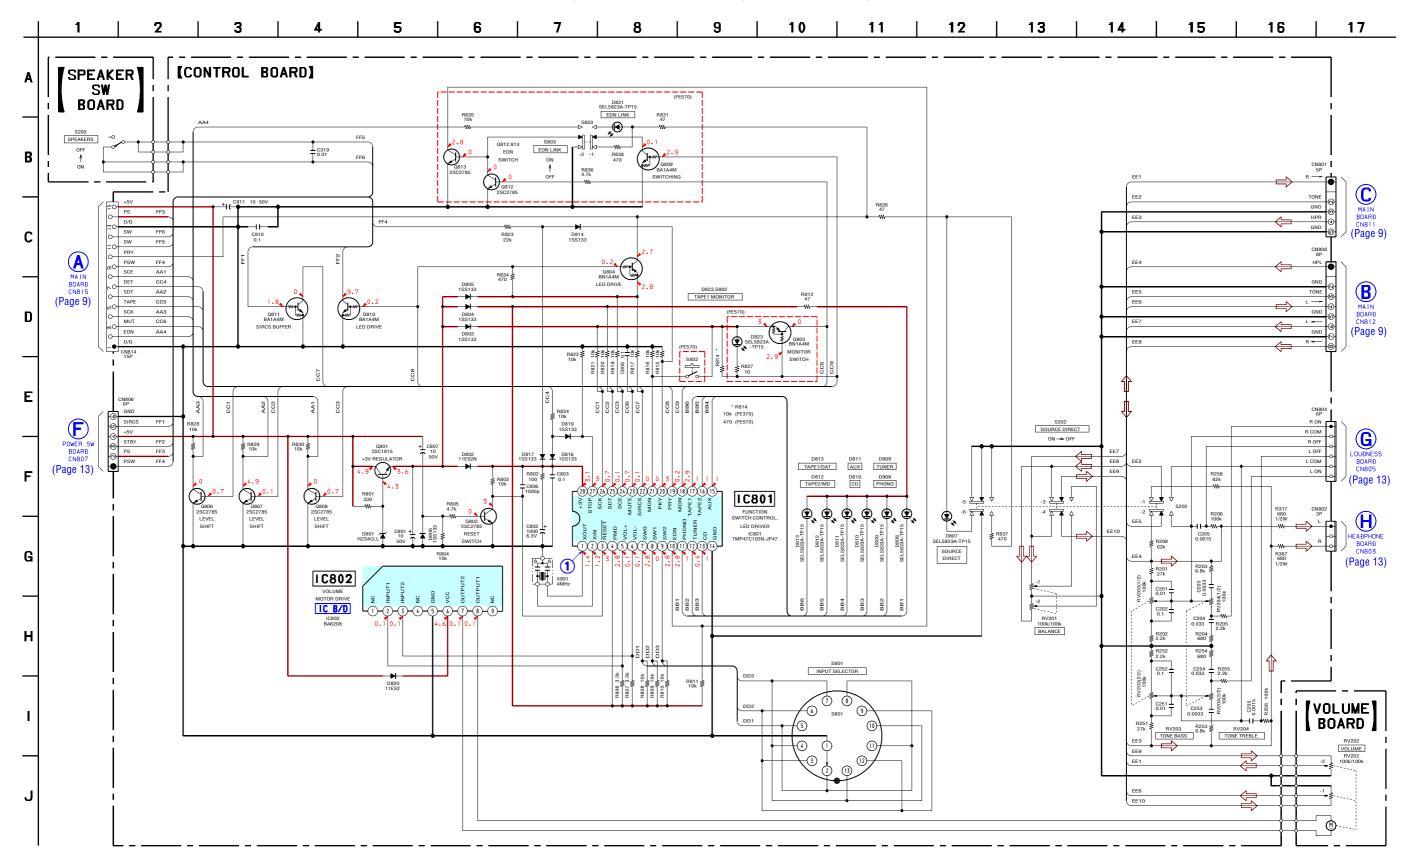


4-6. PRINTED WIRING BOARDS - AC OUTLET/HEADPHONE/LOUDNESS/POWER SW/STANDBY Boards - • See page 7 for Circuit Boards Location.

• Semiconductor Location

Ref. No.	Location
D822 D911 D912 D913	A-3 F-5 F-5 F-5
D914 D915 D916	D-5 F-6 F-6
IC803	B-2

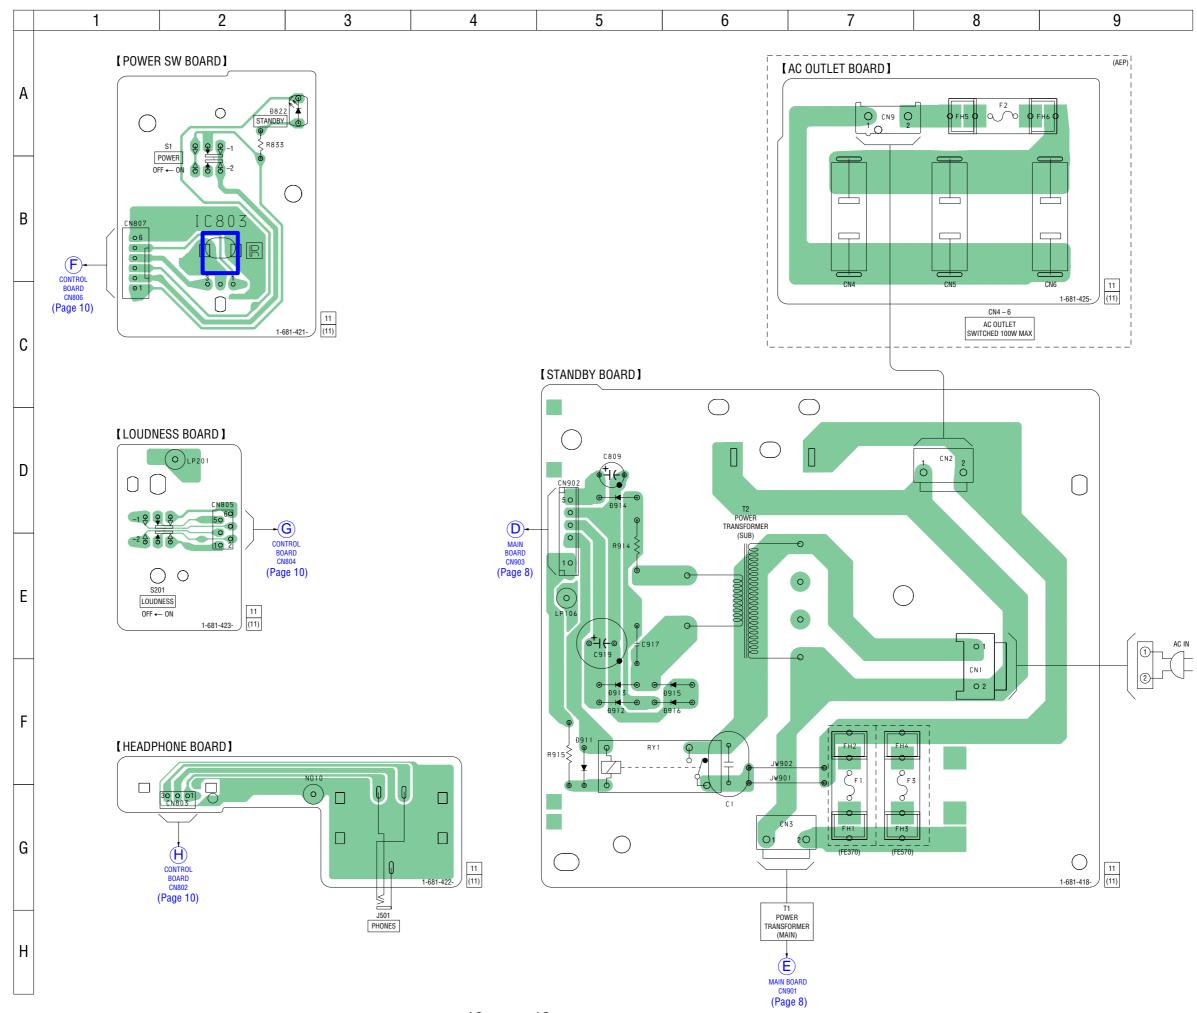


4-7. SCHEMATIC DIAGRAM - AC OUTLET/HEADPHONE/LOUDNESS/POWER SW/STANDBY Boards -

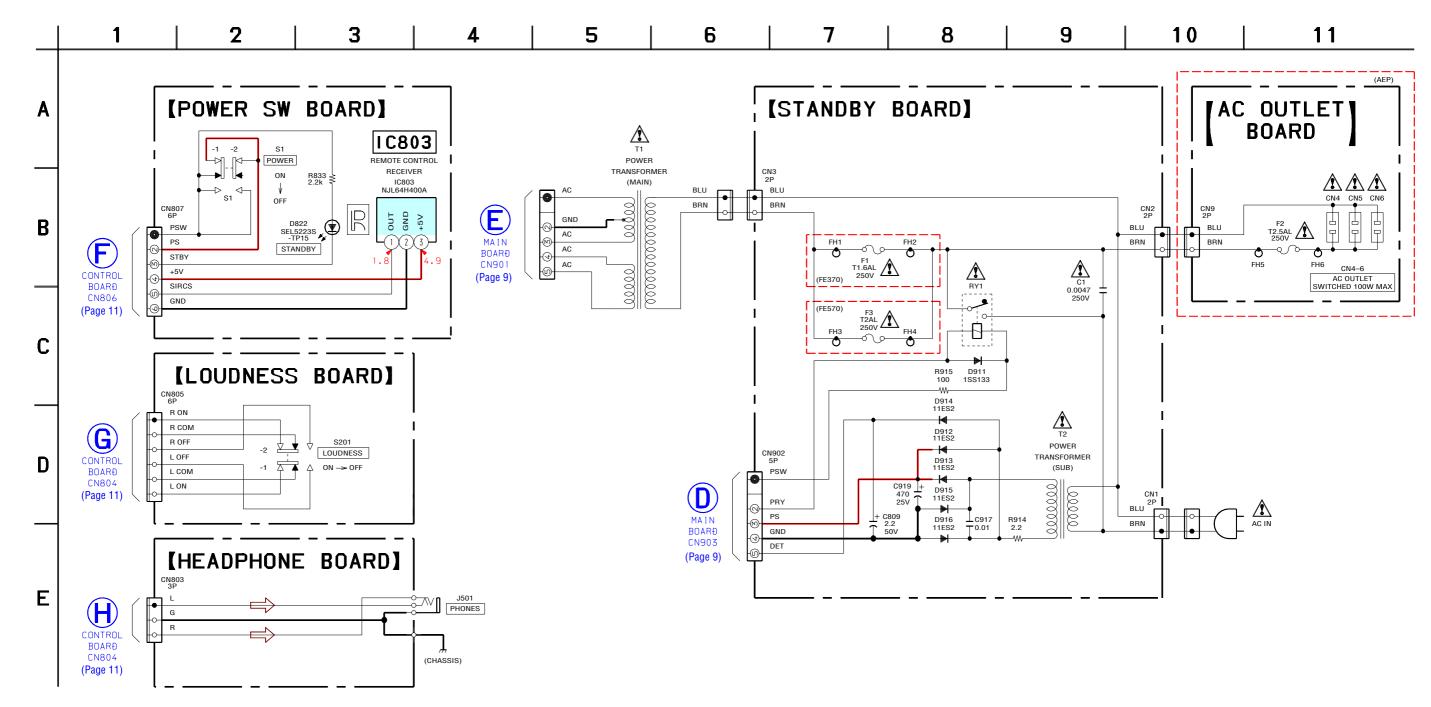


- IC Block Diagrams
- MAIN Board -

IC101 LC7821

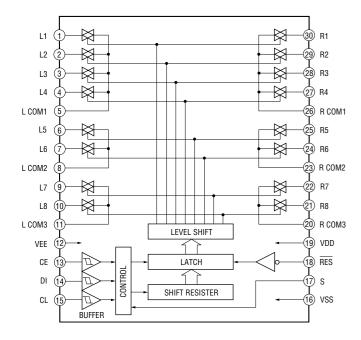


IC601 μ**PC1237HA**

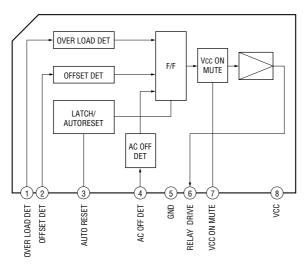

- CONTROL Board -

IC802 BA6208

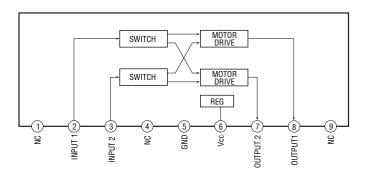

4-8. IC PIN FUNCTION DESCRIPTION

• CONTROL BOARD IC801 TMP47C103N-JP47 (FUNCTION SWITCH CONTROL, LED DRIVER)

Pin No.	Pin Name	I/O	Description
1	XOUT	О	Main system clock output terminal (4 MHz)
2	XIN	I	Main system clock input terminal (4 MHz)
3	RESET	I	System reset signal input terminal "L": reset For several hundreds msec. after the power supply rises, "L" is input, then it changes to "H"
4	PMD	I	Setting terminal for the model (Fixed at "H" in this set)
5	VOL+	О	Motor drive signal output to the volume motor drive (IC802) (volume up direction)
6	VOL-	О	Motor drive signal output to the volume motor drive (IC802) (volume down direction)
7 to 9	SW0 to SW2	I	Rotary switch input of the INPUT SELECTOR (S801)
10	EON	I	Detection signal input of the enhanced other networks (EON) (Used for the TA-FE570) TA-FE370: Not used (fixed at "H")
11	PHONO	О	LED drive signal output of the PHONO LED (D808) "L": LED on
12	TUNER	О	LED drive signal output of the TUNER LED (D809) "L": LED on
13	CD	О	LED drive signal output of the CD LED (D810) "L": LED on
14	GND	_	Ground terminal
15	AUX	О	LED drive signal output of the AUX LED (D811) "L": LED on
16	TAPE2	О	LED drive signal output of the TAPE2/MD LED (D812) "L": LED on
17	TAPE1	О	LED drive signal output of the TAPE1/DAT LED (D813) "L": LED on
18	MON	О	Tape monitor on/off control signal output terminal "L": tape monitor on (Used for the TA-FE570) TA-FE370: Not used (pull up)
19	PRY	О	Power on/off relay drive signal output "L": power on, "H": standby mode
20	PKY	I	POWER switch (S1) input terminal "H": power on
21	MON	I	TAPE1 MONITOR switch (S802) input terminal "H" input when key pressing (Used for the TA-FE570) TA-FE370: Not used (fixed at "L")
22	SIRCS	I	Sircs signal input from the remote control receiver (IC803)
23	MUTE	0	Audio line muting on/off control signal output "H": muting on
24	SCE	О	Chip enable signal output to the function switch (IC101)
25	SDT	0	Serial data output to the function switch (IC101)
26	SCK	О	Serial data transfer clock signal output to the function switch (IC101)
27	STOP	I	Detection signal input of the AC input
28	+3V		Power supply terminal (+3V)

14

SECTION 5 EXPLODED VIEWS

NOTE:

- · -XX and -X mean standardized parts, so they may have some difference from the original
- Color Indication of Appearance Parts Example:

KNOB, BALANCE (WHITE) . . . (RED)


Parts Color Cabinet's Color

- · Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- · The mechanical parts with no reference number in the exploded views are not supplied.
- Accessories and packing materials is given in the last of the electrical parts list.

The components identified by mark \triangle or dotted line with mark ⚠ are critical for safety.


Replace only with part number specified.

5-1. CASE SECTION

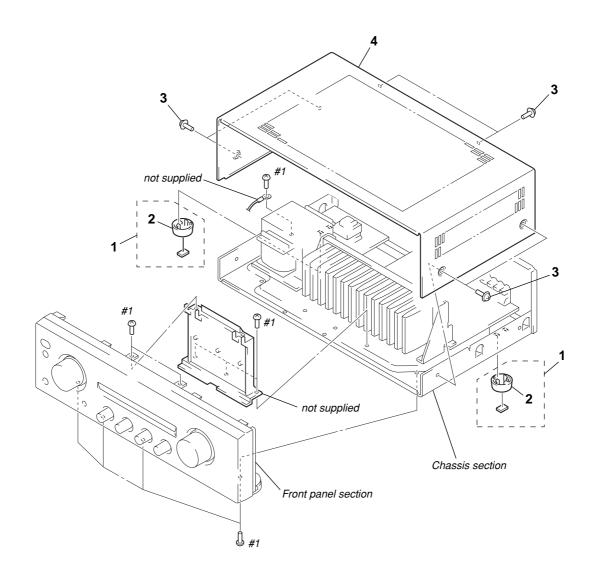


Ref. No.	Part No.	Description	<u>Remark</u>	Ref. No.	Part No.	Description	<u>Remark</u>
1	X-4953-448-1	FOOT ASSY		4	4-233-360-11	CASE (BLACK)	
2	4-232-237-01	FOOT (DIA. 30)		4	4-233-360-31	CASE (SILVER)	
3	4-210-291-01	SCREW (CASE 3 TP2) (BLACK)		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S)	
3	4-210-291-11	SCREW (CASE 3 TP2) (SILVER)					

5-2. FRONT PANEL SECTION

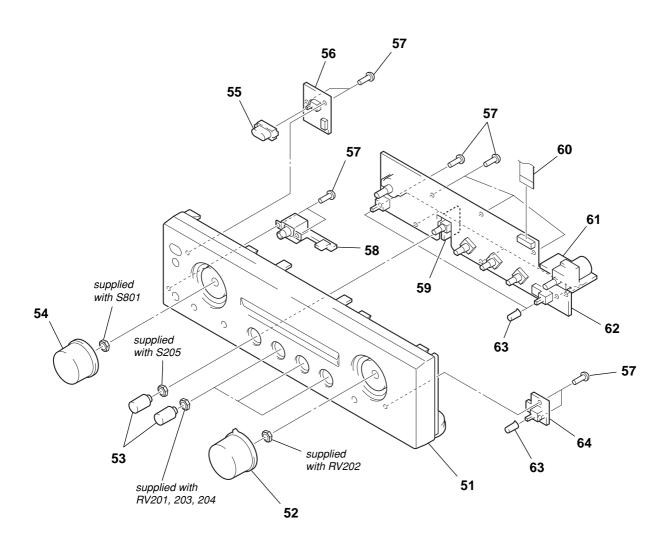

<u>Ref. No.</u>	Part No.	<u>Description</u>	<u>Remark</u>	Ref. No.	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>
51	X-4953-702-1	PANEL, FRONT ASSY (BLACK) (FE57	0)	56	1-681-421-11	POWER SW BOARD	
51	X-4953-703-1	PANEL, FRONT ASSY (BLACK) (FE37	0)	57	4-951-620-01	SCREW (2.6X8), +BVTP	
51	X-4953-704-1	PANEL, FRONT ASSY (SILVER) (FE57	70)	58	1-681-422-11	HEADPHONE BOARD	
51	X-4953-719-1	PANEL, FRONT ASSY (SILVER) (FE37	70)	59	1-681-424-11	SPEAKER SW BOARD	
52	X-4953-705-1	KNOB (VOL) ASSY (BLACK)	,	60	1-773-025-11	WIRE (FLAT TYPE) (15 CORE)	
52	X-4953-706-1	KNOB (VOL) ASSY (SILVER)		61	1-681-420-11	VOLUME BOARD	
53	4-233-365-01	KNOB (BLACK)		62	A-4476-573-A	CONTROL BOARD, COMPLETE (FE5	70)
53	4-233-365-11	KNOB (SILVER)		62	A-4476-583-A	CONTROL BOARD, COMPLETE (FE3	70)
54	4-233-364-01	KNOB (SELECTOR) (BLACK)		63	4-980-189-01	KNOB (DIA. 6) (BLACK)	
54	4-233-364-11	KNOB (SELECTOR) (SILVER)		63	4-980-189-11	KNOB (DIA. 6) (SILVER)	
55		BUTTON (POWER) (BLACK)		64	1-681-423-11	LOUDNESS BOARD	
55	4-231-973-41	BUTTON (POWER) (SILVER)					

5-3. CHASSIS SECTION

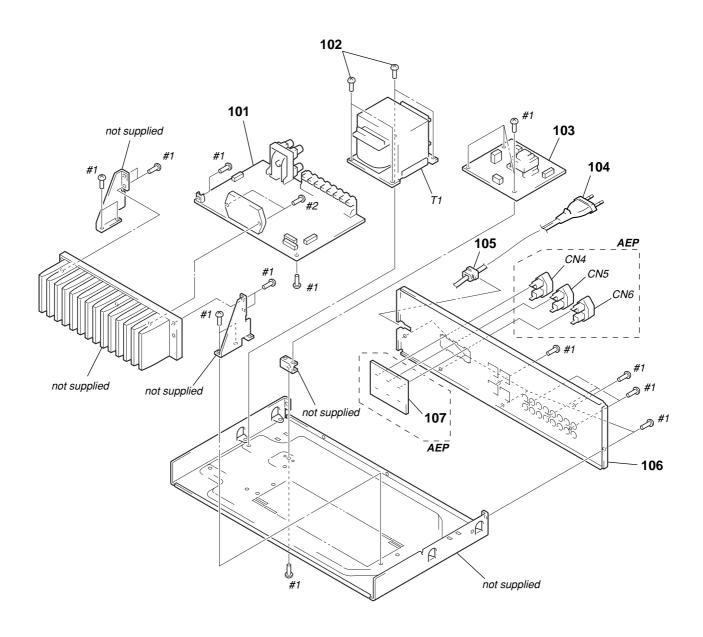

The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	<u>Remark</u>	Ref. No.	Part No.	<u>Description</u>	<u>Remark</u>
101	A-4476-571-A	MAIN BOARD, COMPLETE (FE570)		106	4-233-359-31	PANEL, BACK (FE370: UK)	
101	A-4476-581-A	MAIN BOARD, COMPLETE (FE370)		107	1-681-425-11	AC OUTLET BOARD (AEP)	
102	4-900-386-01	SCREW		△ CN4	1-526-794-11	OUTLET, AC (AEP)	
103	1-681-418-11	STANDBY BOARD		△ CN5	1-526-794-11	OUTLET, AC (AEP)	
△ 104	1-575-651-21	CORD, POWER		△ CN6	1-526-794-11	OUTLET, AC (AEP)	
* 105	3-703-244-00	BUSHING (2104), CORD		<u></u>	1-437-254-11	TRANSFORMER, POWER (FE570)	
106	4-233-359-01	PANEL, BACK (FE570: AEP)		△ T1	1-437-255-11	TRANSFORMER, POWER (FE370)	
106	4-233-359-11	PANEL, BACK (FE570: UK)		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S	
106	4-233-359-21	PANEL, BACK (FE370: AEP)		#2	7-685-650-79	SCREW +BVTP 3X16 TYPE2 N-S	

TA-FE370/FE570 **AC OUTLET**

CONTROL

SECTION 6 ELECTRICAL PARTS LIST

NOTE:

- · Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS

All resistors are in ohms. METAL: Metal-film resistor.

METAL OXIDE: Metal oxide-film resistor.

F: nonflammable

• Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

SEMICONDUCTORS

In each case, u: μ , for example:

 $\begin{array}{ll} uA. \ : \ \mu A. \ . \\ uPB. \ : \ \mu PB. \ . \\ uPD. \ : \ \mu PD. \ . \end{array}$ $uPA..: \mu PA..$ $uPC..: \mu PC..$

 CAPACITORS uF: μF

COILS uH: μH The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.

When indicating parts by reference number, please include the board.

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark	
		AC OUTLET BOAI	RD (AEP)			D805		DIODE 1SS119-	·25			
		******	***			D806	8-710-011-10	DIODE 1SS119-	.25			
	1-533-217-41	HOLDER, FUSE				D807	8-719-058-64	LED SEL5823A-	TP15 (SOU		ECT)	
		< FUSE >				D808 D809		LED SEL5823A- LED SEL5823A-				
		(100L)				D810		LED SEL5823A-		LII)		
 Æ F2 *******		FUSE (T2.5AL/25 *******		******	*****	D811	8-719-058-64	LED SEL5823A-	.ΤΡ15 <i>(</i> ΔΙΙΧ)		
						D812	8-719-058-64	LED SEL5823A-TP15 (TAPÉ2/MD)				
		CONTROL BOAR				D813		LED SEL5823A-		E1/DAT)		
	A-44/6-583-A	CONTROL BOAR			0)	D814 D816		DIODE 1SS119- DIODE 1SS119-				
		OADAOITOD				D047						
		< CAPACITOR >				D817 D819		DIODE 1SS119- DIODE 1SS119-				
C201	1-136-153-00	FILM	0.01uF	5%	50V	D820		DIODE 11ES2-N				
C202	1-136-165-00		0.1uF	5%	50V	D821		LED SEL5823A-				
C203	1-130-477-00		0.0033uF		50V	D823	8-719-058-64	LED SEL5823A-	TP15 (TAPI	E1 MONI		
C204	1-136-159-00		0.033uF	5%	50V						(FE570)	
C205	1-130-473-00	WYLAK	0.0015uF	5%	50V			< IC >				
C251	1-136-153-00	FILM	0.01uF	5%	50V							
C252	1-136-165-00		0.1uF	5%	50V	IC801		IC TMP47C103I	N-JP47			
C253	1-130-477-00		0.0033uF		50V	IC802	8-759-962-08	IC BA6208				
C254 C255	1-136-159-00 1-130-473-00		0.033uF 0.0015uF	5% 5%	50V 50V			< TRANSISTOR >				
0200	1-130-4/3-00	WITLAN	0.001546	J /0	30 V			< THAINSISTUR 2	•			
C319	1-136-153-00		0.01uF	5%	50V	Q801	8-729-119-78		2SC2785-			
C801	1-126-795-11		10uF	20%	50V	Q802	8-729-119-79		2SC2785-			
C802	1-126-916-11 1-164-159-11		1000uF 0.1uF	20%	6.3V 50V	Q803 Q804	8-729-422-57 8-729-422-57		UN4111 (UN4111	FE5/0)		
C803 C806	1-164-159-11		0.1uF 0.001uF	10%	50V 50V	Q804 Q806	8-729-422-57		2SC2785-	FEK		
0000	1 102 254 01	OLITAWIO	0.00141	10 /0	30 V	4000	0 723 113 73	THANGIOTOT	2002703	I LIX		
C807	1-126-795-11		10uF	20%	50V	Q807	8-729-119-79		2SC2785-			
C808	1-164-159-11		0.1uF		50V	Q808	8-729-119-79		2SC2785-			
C810 C811	1-164-159-11 1-126-795-11		0.1uF	20%	50V 50V	Q809	8-729-900-80 8-729-900-80		DTC114ES			
6011	1-120-790-11	ELEGI	10uF	20%	307	Q810 Q811	8-729-900-80		DTC114E3			
		< CONNECTOR >				4011	0 120 000 00	110,000,0101	DIOTTIE	,		
011000	1 770 000 11	HOUGING CONN	FOTOD (DO	DOADD	. 0.D	Q812	8-729-119-79		2SC2785-	,	,	
		HOUSING, CONN CONNECTOR, BO) 3P	Q813	8-729-119-79	TRANSISTUR	2SC2785-	FEK (FES	70)	
CN806	1-770-143-11	CONNECTOR, BO	ARD TO BO	ARD 6P				< RESISTOR >				
CN814		CONNECTOR, FF										
		5.455				R201	1-249-434-11		27K	5%	1/4W	
		< DIODE >				R202	1-249-421-11		2.2K	5%	1/4W	
D801	8 - 710-085-50	DIODE HZS4CL				R203 R204	1-249-427-11 1-249-415-11		6.8K 680	5% 5%	1/4W 1/4W	
D801		DIODE H234CL				R204	1-249-415-11		2.2K	5%	1/4W	
D803		DIODE 1SS119-				1.200	. 210 121 11	J. 11 12 0 14		3 /3	.,	
D804	8-719-911-19	DIODE 1SS119-	25			R206	1-249-441-11	CARBON	100K	5%	1/4W	

				СО	NTROL	HE	ADPHON	E	LOUI	DNESS	S N	MAIN
Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Descrip	tion			Remark
		·	601/	E0/								
R208	1-247-874-11		62K	5%	1/4W			< SWIT	лп >			
R251	1-249-434-11	-	27K	5%	1/4W	0000	4 574 000 44	CMITOI	L DUCLL /	4 I/E//\ /00	LIDAE DI	DEOT)
R252	1-249-421-11		2.2K	5%	1/4W	S202	1-571-828-11					
R253	1-249-427-11	CARBON	6.8K	5%	1/4W	S801 S802	1-692-974-11 1-771-349-21					
R254	1-249-415-11		680	5%	1/4W	0002	177101021	0111101	i, KET 50.	, t. (, , E ,	10101111	(FE570)
R255	1-249-421-11	CARBON	2.2K	5%	1/4W	S803	1-571-112-21	SWITCH	ł, PUSH (1 KEY) (E0I	V LINK)	(FE570)
R256	1-249-441-11	CARBON	100K	5%	1/4W							
R258	1-247-874-11		62K	5%	1/4W			< VIBRA	ATOR >			
R317	1-249-798-11	CARBON	680	5%	1/2W	X801	1-577-358-21	VIRRAT	OR CER	MIC (AMH	٠١	
R367	1-249-798-11	CARRON	680	5%	1/2W		******			,	,	*****
R801	1-249-411-11		330	5%	1/4W							
R802	1-247-807-31		100	5%	1/4W		1-681-422-11	HEVDDI	IONE BO	ARD		
R803	1-249-429-11		10K	5%	1/4W		1-001-422-11		******			
R804	1-249-429-11		10K	5%	1/4W							
11004	1-243-423-11	OANDON	TOIX	J /0	1/400			< CONN	ECTOR >			
R805	1-249-425-11	CARBON	4.7K	5%	1/4W							
R806	1-247-843-11	CARBON	3.3K	5%	1/4W	CN803	1-770-387-11	PIN, CO	NNECTOR	R (PC BOAR	D) 3P	
R807	1-247-843-11	CARBON	3.3K	5%	1/4W					,	,	
R808	1-249-429-11	CARBON	10K	5%	1/4W			< JACK	>			
R809	1-249-429-11	CARBON	10K	5%	1/4W							
						J501	1-750-735-11					
R810	1-249-429-11		10K	5%	1/4W	******	*****	******	******	*******	*****	*****
R811	1-249-429-11		10K	5%	1/4W							
R812	1-249-401-11	CARBON	47	5%	1/4W		1-681-423-11	LOUDNI	ESS BOAI	RD		
R814	1-249-413-11	CARBON	470	5%	1/4W			*****	******	***		
R814	1-249-429-11	CARRON	10K	5%	(FE570) 1/4W			< CONN	ECTOR >			
11014	1 243 423 11	OAITBOIL	1010	3 70	(FE370)			< 001111	LOTOIT			
					, ,	CN805	1-750-186-11	CONNEC	CTOR, BO	ARD TO BO	ARD 6P	
R815	1-249-429-11		10K	5%	1/4W							
R816	1-249-429-11		10K	5%	1/4W			< SWIT	CH >			
R817	1-249-429-11		10K	5%	1/4W							
R819	1-249-429-11		10K	5%	1/4W	S201	1-571-112-21		,	, ,		,
R820	1-249-429-11	CARBON	10K	5%	1/4W	*****	******	******	******	******	******	******
R821	1-249-429-11	CARBON	10K	5%	1/4W		A-4476-571-A	MAIN B	OARD, CO	OMPLETE (F	E570)	
R822	1-249-429-11	CARBON	10K	5%	1/4W		A-4476-581-A	MAIN B	OARD, CO	OMPLETE (F	E370)	
R823	1-249-433-11	CARBON	22K	5%	1/4W					******	,	
R824	1-249-429-11	CARBON	10K	5%	1/4W							
R826	1-249-401-11	CARBON	47	5%	1/4W			< CAPA	CITOR >			
R827	1-249-393-11	CARRON	10	5%	1/4W	C101	1-162-282-31	CERAM	ır	100PF	10%	50V
11021	1-243-333-11	CANDON	10	J /0	(FE570)	C102	1-162-286-31			220PF	10%	50V
R828	1-249-429-11	CARRON	10K	5%	1/4W	C103	1-126-963-11		10	4.7uF	20%	50V
R829	1-249-429-11		10K	5%	1/4W	C104	1-120-303-11			4.7uF	20%	16V
R830	1-249-429-11		10K	5%	1/4W	C105	1-162-282-31		ır	100PF	10%	50V
R831	1-249-401-11		47	5%	1/4W	0103	1-102-202-31	CLINAIVI	10	10011	10 /0	J0 V
11001	1-243-401-11	CANDON	71	J /0	(FE570)	C106	1-130-480-00	ΜΥΙ ΔΡ		0.0056uF	5%	50V
					(1 2370)	C107	1-130-473-00			0.0036ui		50V
R834	1-249-413-11	CARRON	470	5%	1/4W	C108	1-126-964-11			10uF	20%	50V
R835	1-249-429-11		10K	5%	1/4W	C109	1-126-964-11	_		10uF	20%	50V
11000	1-243-423-11	OANDON	TOIX	J /0	(FE570)	C110	1-126-963-11			4.7uF	20%	50V
R836	1-249-425-11	CARBON	4.7K	5%	1/4W	0110	1 120 300 11	LLLOI		4.7 ui	2070	(FE570)
D00=	4 040 445 44	OADBON	470	F0/	(FE570)	0445	4 400 001 01	055	10	0.004 =	4007	F01 /
R837	1-249-413-11		470	5%	1/4W	C112	1-162-294-31			0.001uF	10%	50V
R838	1-249-413-11	CARBON	470	5%	1/4W	C114	1-162-306-11		IC	0.01uF	30%	16V
					(FE570)	C115	1-126-963-11		_	4.7uF	20%	50V
		< VARIABLE RE	CICTOD V			C151 C152	1-162-282-31 1-162-286-31			100PF 220PF	10% 10%	50V 50V
		Z AVIUNDET IJE	J.U.I UI (>			0102	1 102-200-01	OLIVANI		££01 1	10/0	50 V
RV201		RES, VAR, CARE				C153	1-126-963-11			4.7uF	20%	50V
RV203		RES, VAR, CARE			NE BASS)	C154	1-104-660-11			47uF	20%	16V
RV204	1-223-397-21	RES, VAR, CARE	30N 100K/1			C155	1-162-282-31			100PF	10%	50V
				(TON	E TREBLE)	C156	1-130-480-00			0.0056uF		50V
						C157	1-130-473-00	MYLAR		0.0015uF	5%	50V
						C158	1-126-964-11	ELFCT		10uF	20%	50V
						3.30	0 00111			***		

MAIN

Ref. No.	Part No.	<u>Description</u>			<u>Remark</u>	Ref. No.	Part No.	<u>Description</u>			<u>Remark</u>
C301	1-126-964-11		10uF 470PF	20%	50V 50V	C905	1-126-968-11	ELECT	100uF	20%	50V
C302 C303 C305	1-162-290-31 1-162-282-31 1-126-933-11	CERAMIC	100PF 100uF	10% 10% 20%	50V 50V 16V	C905	1-128-576-11	ELECT	100uF	20%	(FE370) 63V (FE570)
C306	1-126-967-11		47uF	20%	50V	C906	1-126-968-11	ELECT	100uF	20%	50V (FE370)
C306	1-128-552-11	ELECT	47uF	20%	(FE370) 63V (FE570)	C906	1-128-576-11	ELECT	100uF	20%	63V (FE570)
C307	1-126-965-11	ELECT	22uF	20%	50V (FE370)	C907 C908	1-161-494-00 1-104-660-11	-	0.022uF 47uF	20%	25V 16V
C307	1-128-551-11	ELECT	22uF	20%	63V (FE570)	C909 C910	1-104-660-11 1-126-933-11	ELECT	47uF 100uF	20% 20%	16V 16V
C308	1-126-965-11	ELECT	22uF	20%	50V (FE370)	C911	1-126-933-11	ELECT	100uF	20%	16V
C308	1-128-551-11	FI FCT	22uF	20%	63V	C912 C913	1-136-153-00 1-126-964-11		0.01uF 10uF	5% 20%	50V 50V
C309	1-126-965-11		22uF	20%	(FE570) 50V	C915 C916	1-126-933-11 1-126-963-11	ELECT	100uF 4.7uF	20% 20%	16V 50V
C309	1-128-551-11		22uF	20%	(FE370) 63V	00.0	20 000	< CONNECTOR >		20,0	
					(FE570)						
C310	1-126-969-11		220uF	20%	50V (FE370)	CN811 CN812	1-691-770-11	PLUG (MICRO CO PLUG (MICRO CO	NNECTOR	, 8P	
C310	1-128-553-11	ELECT	220uF	20%	63V (FE570)	CN813		PIN, CONNECTOR	`	CONTROL	_ IN) (FE570)
C311	1-136-165-00	MYLAR	0.1uF	5%	50V	CN815 CN901		CONNECTOR, FFO) 5P	
C312	1-136-165-00		0.1uF	5%	50V			(,	
C313	1-104-660-11	ELECT	47uF	20%	16V			< DIODE >			
C314	1-162-211-11	CERAMIC	33PF	5%	50V						
C315	1-126-969-11		220uF	20%	50V (FE370)	D101 D301 D302	8-719-911-19	DIODE 1SS119- DIODE 1SS119- DIODE 1SS119-	25 `		
C315	1-128-553-11		220uF	20%	63V (FE570)	D351 D352	8-719-911-19	DIODE 1SS119- DIODE 1SS119-	25		
C351	1-126-964-11	ELECT	10uF	20%	50V						
C352	1-162-290-31		470PF	10%	50V	D601		DIODE 1SS119-			
C353	1-162-282-31		100PF	10%	50V	D901		DIODE RBV-602			
C355	1-126-933-11	ELECT	100uF	20%	16V	D902 D903		DIODE HZS12A2 DIODE HZS12A2			
C356	1-126-967-11	ELECT	47uF	20%	50V (FE370)	D904		DIODE 11ES2-N			
C356	1-128-552-11	ELECT	47uF	20%	63V (FE570)	D905 D906		DIODE 11ES2-N DIODE 11ES2-N			
C361	1-136-165-00	MVIΔR	0.1uF	5%	(1 L37 0) 50V	D907		DIODE 11ES2-N			
C362	1-136-165-00		0.1uF	5%	50V	D909		DIODE 11ES2-N			
C363	1-104-660-11		47uF	20%	16V	2000	0 710 021 00	< IC >	INED		
C364	1-162-211-11	CERAMIC	33PF	5%	50V						
C601	1-126-961-11	-	2.2uF	20%	50V	IC101	8-759-805-13	IC LC7821			
C602	1-126-934-11	ELECT	220uF	20%	10V	IC102	8-759-184-02	IC NJM2068L-D			
C603	1-104-660-11	ELECT	47uF	20%	16V	IC301	8-749-921-04	IC STK4211MK2	(FE370)		
C812	1-164-159-11	CERAMIC	0.1uF		50V	IC301	8-749-922-65	IC STK4221MK2	(FE570)		
					(FE570)	IC601	8-759-111-68	IC uPC1237HA	, ,		
C900	1-136-153-00		0.01uF	5%	50V	IC901	8-759-708-05	IC NJM78L05A			
C901 C902	1-137-397-11 1-137-397-11		0.047uF 0.047uF	5% 5%	100V 100V			< JACK >			
C903	1-137-337-11		8200uF	20%	56V			\ JAUN /			
C903	1-125-815-11	ELECT	6800uF	20%	(FE570) 50V (FE370)	J101 J102	1-794-981-11 1-793-776-12			ĺ	
0.6					(FE370)	J103	1-793-776-12	JACK, PIN 6P (TA		,	,
C904	1-125-793-11		8200uF	20%	56V (FE570)				/DAT RECO	UI, IAPE	:1/DALIN)
C904	1-125-815-11	ELECT	6800uF	20%	50V (FE370)			< COIL >			
						L301	1-420-872-00	COIL, AIR-CORE			

MAIN

										L	WAIN
Ref. No.	Part No.	<u>Description</u>			<u>Remark</u>	Ref. No.	Part No.	<u>Description</u>			<u>Remark</u>
L351	1-420-872-00	COIL, AIR-CORE				R176	1-249-441-11	CARBON	100K	5%	1/4W
		,				R207	1-249-425-11	CARBON	4.7K	5%	1/4W
		< TRANSISTOR >				R257	1-249-425-11	CARBON	4.7K	5%	1/4W
Q101	8-729-141-26	TRANSISTOR	2SC3622	A-LK		R301	1-249-439-11	CARBON	68K	5%	1/4W
Q102	8-729-119-76	TRANSISTOR	2SA1175	-HFE		R302	1-249-417-11	CARBON	1K	5%	1/4W
Q103	8-729-119-79	TRANSISTOR	2SC2785	-FEK (FE	570)	R303	1-249-414-11	CARBON	560	5%	1/4W
Q104	8-729-119-79		2SC2785			R304	1-249-439-11		68K	5%	1/4W
Q151	8-729-141-26	TRANSISTOR	2SC3622	A-LK		R305	1-260-107-11	CARBON	4.7K	5%	1/2W
Q301	8-729-140-82	TRANSISTOR	2SA988-F	PAFAEA		R306	1-260-107-11	CARBON	4.7K	5%	1/2W
Q351	8-729-140-82	TRANSISTOR	2SA988-F	PAFAEA		R307	1-249-405-11	CARBON	100	5%	1/4W
Q901	8-729-119-78	TRANSISTOR	2SC2785	-HFE		R308	1-260-328-11	CARBON	1K	5%	1/2W
Q902	8-729-201-53		2SA1015			R309	1-260-328-11		1K	5%	1/2W
Q903	8-729-119-79	TRANSISTOR	2SC2785	-FEK		R310	1-249-405-11	CARBON	100	5%	1/4W
		< RESISTOR >				R312	1-249-421-11	CARBON	2.2K	5%	1/4W
						R313	1-249-433-11		22K	5%	1/4W
R101	1-249-417-11		1K	5%	1/4W	 ∆ R314	1-244-164-11		0.22	10%	5W F
R102	1-249-413-11		470	5%	1/4W	R315	1-249-439-11	-	68K	5%	1/4W
R104	1-249-437-11		47K	5%	1/4W	R316	1-260-300-11	CARBON	4.7	5%	1/2W
R105	1-249-416-11		820	5%	1/4W	D040	1 040 000 44	OADDON	40	5 0/	4 / 414 /
R106	1-247-897-11	CARBON	560K	5%	1/4W	R318	1-249-393-11 1-249-385-11		10	5%	1/4W
R107	1-249-437-11	CADDON	47K	5%	1/4W	R320 R321	1-249-385-11		2.2 2.2	5% 5%	1/6W 1/6W
R107	1-249-441-11		100K	5 % 5%	1/4W 1/4W	R322	1-249-385-11		2.2	5%	1/6W
R109	1-249-409-11		220	5%	1/4W 1/4W	R351	1-249-439-11		68K	5%	1/6W
R110	1-249-417-11		1K	5%	1/4W	11001	1 243 403 11	OANDON	OOK	3 /0	1/400
R111	1-249-417-11		1K	5%	1/4W	R352	1-249-417-11	CARBON	1K	5%	1/4W
		07.11.2011		0,0	.,	R353	1-249-414-11		560	5%	1/4W
R112	1-249-417-11	CARBON	1K	5%	1/4W	R354	1-249-439-11		68K	5%	1/4W
R113	1-249-417-11	CARBON	1K	5%	1/4W	R355	1-260-107-11	CARBON	4.7K	5%	1/2W
R114	1-249-417-11	CARBON	1K	5%	1/4W	R356	1-260-107-11	CARBON	4.7K	5%	1/2W
R115	1-249-417-11	CARBON	1K	5%	1/4W						
R116	1-249-417-11	CARBON	1K	5%	1/4W	R362	1-249-421-11		2.2K	5%	1/4W
						R363	1-249-433-11		22K	5%	1/4W
R117	1-249-417-11		1K	5%	1/4W	△ R364	1-244-164-11		0.22	10%	5W F
R118	1-249-425-11		4.7K	5%	1/4W	R365	1-249-437-11		47K	5%	1/4W
R119 R120	1-249-425-11 1-249-409-11		4.7K	5%	1/4W	R366	1-260-300-11	CARBON	4.7	5%	1/2W
R120	1-249-409-11		220 47K	5% 5%	1/4W 1/4W	R368	1-249-393-11	CARRON	10	5%	1/4W
11121	1-245-457-11	CANDON	4710	J /0	1/4 00	R601	1-260-095-11		470	5%	1/4VV 1/2W
R122	1-249-419-11	CARBON	1.5K	5%	1/4W	11001	1 200 033 11	OANDON	470	3 /0	(FE370)
R123	1-249-427-11		6.8K	5%	1/4W	R601	1-260-097-11	CARBON	680	5%	1/2W
R124	1-249-425-11	CARBON	4.7K	5%	1/4W						(FE570)
					(FE570)	R602	1-260-097-11	CARBON	680	5%	1/2W
R125	1-249-429-11		10K	5%	1/4W	R603	1-249-417-11	CARBON	1K	5%	1/4W
R126	1-249-441-11	CARBON	100K	5%	1/4W			0488000	400		4,
B.15.	4 040 44= 44	OADDOM	417	F0/	4/44	R604	1-249-441-11		100K	5%	1/4W
R151	1-249-417-11		1K	5%	1/4W	R605	1-249-439-11		68K	5%	1/4W
R152 R154	1-249-413-11 1-249-437-11		470 47K	5% 5%	1/4W 1/4W	R606 R607	1-249-431-11 1-260-103-11		15K 2.2K	5% 5%	1/4W 1/2W
R154	1-249-437-11		820	5 % 5%	1/4W 1/4W	R608	1-260-103-11		2.2K 2.2K	5%	1/2W
R156	1-243-410-11		560K	5%	1/4W 1/4W	11000	1-200-103-11	CANDON	2.21	J /0	1/ Z V V
11100	1 2 11 001 11	0,1112011	00011	0 70	.,	R832	1-249-393-11	CARBON	10	5%	1/4W
R157	1-249-437-11		47K	5%	1/4W						(FE570)
R158	1-249-441-11		100K	5%	1/4W	R901	1-249-385-11		2.2	5%	1/6W
R159	1-249-409-11		220	5%	1/4W	R902	1-260-097-11	CARBON	680	5%	1/2W
R160	1-249-417-11		1K	5%	1/4W	D000	4 000 000 44	0.4.0.0.0.1	416	5 0/	(FE370)
R161	1-249-417-11	CARRON	1K	5%	1/4W	R902	1-260-328-11	CAKRON	1K	5%	1/2W (FE570)
R162	1-249-417-11	CARBON	1K	5%	1/4W	R903	1-260-097-11	CARBON	680	5%	1/2W
R163	1-249-417-11		1K	5%	1/4W		50 001 11	SDOIL		3 /0	(FE370)
R164	1-249-417-11		1K	5%	1/4W						(. 20. 0)
R165	1-249-417-11		1K	5%	1/4W	R903	1-260-328-11	CARBON	1K	5%	1/2W
R166	1-249-417-11		1K	5%	1/4W						(FE570)
						R904	1-260-097-11		680	5%	1/2W
R167	1-249-417-11		1K	5%	1/4W	R905	1-260-097-11	CARBON	680	5%	1/2W
R168	1-249-425-11	CARBON	4.7K	5%	1/4W	I					

The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.

MAIN	POW	ER SW	SPEAKER SW		STANDBY VOLUME			DLUME					
Ref. No.	Part No.	<u>Description</u>			<u>Remark</u>	Ref. No.	Part No.		<u>Description</u>		<u>Remark</u>		
R907	1-260-328-11	CARBON	1K	5%	1/2W	CN2			PIN, CONNECTOR 2P				
R907	1-260-330-11	CARBON	1.5K	5%	(FE370) 1/2W (FE570)	CN3 CN902			PIN, CONNECTOR 2P PLUG (MICRO CONNEC	TOR) 5P			
R908	1-260-328-11		1K	5%	1/2W				< DIODE >				
R910 R912	1-249-429-11 1-249-429-11		10K 10K	5% 5%	1/4W 1/4W	D911	8-719-91	1-10	DIODE 1SS119-25				
R913	1-249-433-11	CARBON	22K	5%	1/4W	D912	8-719-02	4-99	DIODE 11ES2-NTA2B				
R916	1-249-419-11	CARBON	1.5K	5%	1/4W	D913 D914			DIODE 11ES2-NTA2B DIODE 11ES2-NTA2B				
		< RELAY >				D915	8-719-02	24-99	DIODE 11ES2-NTA2B				
RY101 RY601	1-515-614-11 1-515-920-11	RELAY (FE570)				D916	8-719-02	24-99	DIODE 11ES2-NTA2B				
	1 010 020 11	, ,							< FUSE >				
		< TERMINAL >				▲F1			FUSE (T1.6AL/250V) (FI	,			
		TERMINAL BOA	,	,	*****	 ⚠ F 3	1-532-38	88-31	FUSE (T2AL/250V) (FE5	70)			
	1 601 401 11	POWER SW BO	ADD						< RESISTOR >				
	1-001-421-11	*********				R914			CARBON 2.2	5%	1/6W		
		< CONNECTOR	>			R915	1-247-80)7-31	CARBON 100	5%	1/4W		
CN807	1-568-668-11	CONNECTOR, B	OARD TO BO	OARD 6P					< RELAY >				
		<led></led>				⚠ RY1 1-755-276-11			RELAY, POWER				
D822	8-719-058-04	LED SEL5223	S-TP15 (STA	NDBY)					< TRANSFORMER >				
		< IC >	- (-	,		↑T2 ********			TRANSFORMER, POWE		*****		
IC803	8-759-459-86	IC NJL64H400	A (REMOTE CO	ONTROL	RECEIVER)		1-681-42	20-11	VOLUME BOARD *******				
		< RESISTOR >							< VARIABLE RESISTOR	>			
R833	1-249-421-11	CARBON	2.2K	5%	1/4W				RES, VAR, CARBON 100				
		< SWITCH >							MISCELLANEOUS				
S1 ******		SWITCH, PUSH			******				*********				
	1 601 404 11	SPEAKER SW E	OADD			60 △ 104			WIRE (FLAT TYPE) (15 CORD, POWER	CORE)			
	1-001-424-11	*******	-			△ CN4	1-526-79	94-11	OUTLET, AC (AEP)				
		< SWITCH >				△ CN5 △ CN6			OUTLET, AC (AEP) OUTLET, AC (AEP)				
S205		SWITCH, ROTA				△T1			TRANSFORMER, POWE	,			
*******	*******	*******	*******	******	*****	▲T1			TRANSFORMER, POWE	,	*****		
	1-681-418-11	STANDBY BOAF					ACCESSO	ORIES	& PACKING MATERIALS				
	1-533-217-41	HOLDER, FUSE					******	****	*******				
		< CAPACITOR >				\triangle			ADAPTOR, CONVERSIO REMOTE COMMANDER		` '		
∆ C1	1-113-924-11		0.0047uF	200/	250V				MANUAL, INSTRUCTION (ENGLISH, FRENCE)	Ň ĺ			
C809	1-113-924-11	-	2.2uF	20%	50V		4-233-88	35-21	MANUAL, INSTRUCTION	V	•		
C917 C919	1-162-306-11 1-126-941-11	-	0.01uF 470uF	30% 20%	16V 25V		4-981-64	3-01	(DUTCH, SWEDISH, I'COVER, BATTERY (for F		LISH) (AEP)		
		< CONNECTOR	>						. (// .	- /			
* CN1	1-580-230-11	PIN, CONNECTO		RD) 2P									
0.11	. 555 250 11	, 0014142011	₍ . o bo/li	, -1									

The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.

<u>MEMO</u>

REVISION HISTORY

Clicking the version allows you to jump to the revised page.

Also, clicking the version at the upper right on the revised page allows you to jump to the next revised page.

Ver.	Date	Description of Revision
1.0	2001.04	New